


120/277/347
VAC In




LX Panel
(32 Relay Shown)

LX Panels, DCIM, and 3-wire Momentary Switches.

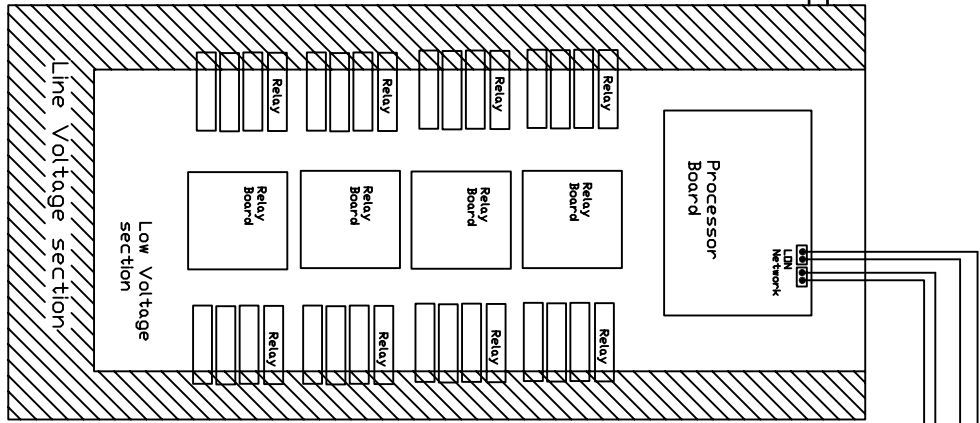

Building Automation, Inc.

2 Wire Network
Belden 8471




LX Communication Network


The LX network is a 2-wire communication network. It can operate using any topology (layout) or combination of topologies including Star and T-configurations.

Network cable shall be Belden 8471 or approved equal. Contact HBA for alternate cable types. Maximum total wire length per network segment (without requiring the use of the LX Router/Repeater Module, p/n LXRRM) shall not exceed 1500 feet. Up to 56 devices can be supported per network segment.

NOTE: Do not use shielded cable.



LX Dry Contact

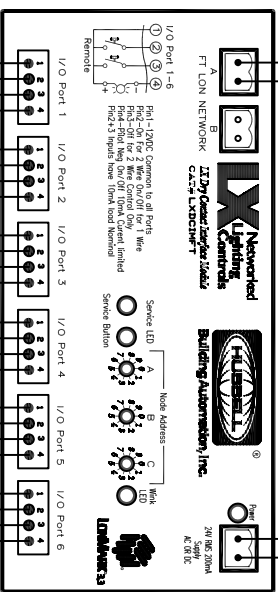

Momentary On Off Switch
Configuration with LED
Momentary Switch by Others